

Tender text all products, overview:

TECHNICAL CHARACTERISTICS

Our products are made of long-time proven nonwovens, which are optimized for any type of soil. Up to 90% of the volume consists of interconnected air pores, which can store water and redistribute it by capillary action. All the water is thus immediately available to plants. Our products are available in 3 different materials:

		weight	thickness
BIO1	WOOD FIBER (100% cellulose fibers)	330 g/m ²	4 mm
	100% biodegradable after about 1-2 years	600 g/m ²	6 mm
BIO5	PLA (70% PLA + 30% cellulose fibers) 100% biodegradable/compostable after approx. 5-10 years	500 g/m²	6 mm
PP	PP (100% polypropylene fibers)	600 g/m ²	5 mm
77	durable, reusable and sustainable	900 g/m ²	7 mm

Standard prod	Bio1		Bio5		PP				
•		T	4 mm	6 mm	6 mm	3	mm	5 mm	7 mm
LITE-STRIPS *	Units Weight	t in Kg approx.							
70 x 12 mm	1 m³ BB	50/45/50		Х	Х			Х	
70 x 12 mm	5 x 50 l Box	12/11/12		х	х			х	
70 x 12 mm	250 I Box	12/11/12		х	х			х	
LITE-CUBES									
12 x 12 mm	1 m³ BB	60/55/60		Х	Х	П		Х	
12 x 12 mm	250 I Box	15/13/15		Х	х			х	
LITE-NET **	•								
LITE- NET Tree	L - For root balls up to r XL - For root balls from a	nax. Ø 60/65 cm pprox. Ø 60 cm	1						
L: 1,5 x 0,8 m	90 pcs. Box	19/16/19		Х	Х	П		Х	
XL: 1,75 x 1,6 m	45 pcs. Box	19/16/19		х	х			Х	
LITE- NET Slope (Re	oll C14 = meshes Ø 9) cm)							
350: 3,5 x 14,3 m	50 m²	7/12/10	х	Х	х				
520: 5,2 x 14,3 m	75 m²	10/17/14	х	Х	х				
LITE- NET Standard (Roll C20 = meshes Ø 13 cm)									
175: 1,75 x 16,3 m	28 m²	6/5/6		Х	х			Х	
350: 3,5 x 16,3 m	57 m²	10/11/15			х			х	х
520: 5,2 x 16,3 m	85 m²	14/16/23			Х			Х	Х
BLUELITE-NET CO	OMPONENTS								
BLUELITE-COVER	25 m (16 pcs. of	25m in a 25kg box)					х		
BLUELITE-TUBE	100 m	14					Х		
BLUELITE-TUBE	20 pcs. 100 m						Х		
BLUELITE-RING	10 pcs. Ø 50 cm	4					Х	25	
BLUELITE-NET SY	STEM: LITE-NET Stand	ard Rall PP C20 BE (BLUELITE-AGRI)				0.72			
BLUELITE-NET SYSTEM	50 m²	25						х	
BLUELITE-NET SYSTEM	75 m²	38						Х	
BLUELITE-NET SYSTEM	1200 m ²							х	
LITE-ROOTPROTE	СТ								
Root bandage	8 pcs. 0,1 x 8 m	3	х						
Root bandage	16 pcs. 0,1 x 8 m	6	х						
Root curtain M	0,8 x 20 m	5	Х						
Root curtain L	1,2 x 20 m	7	Х						

^{*} LITE-STRIPS: Bio1 = 50 kg/m³ | Bio5 = 45 kg/m³ | PP = 50 kg/m³

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com



^{**} Specifications are maximum sizes. Recommendation: For optimal results and easier installation, reduce the laying width e.g., instead of 5.2 m only 4 - 4.5 m (area reduction approx. 10 - 15%).



Tender text all products:

- 1. LITE-**STRIPS**: Water storage and aeration close to the roots in strip form
- 2. LITE-NET rolls: Water storage net and water distribution net
- 3. LITE-**NET Tree**: Pre-assembled vegetation and distribution net for trees
- 4. LITE-ROOTPROTECT: Root protection nonwoven for trees on construction sites
- 5. **BLUE**LITE-**NET**: Water-saving underground irrigation
- 6. LITE-CUBES: Water storage cubes for special applications
- 7. BLUELITE-RING: Ready-made for trees

1. LITE-STRIPS:

As substrate improvement and near-root water storage for lawns, athletic fields, green roofs, slopes, trees, vegetation aid for turf, large tree transplantations, plant pots and raised planting beds in 3 material variants:









1.1 LITE-STRIPS Bio1:

Water storage nonwoven in strip form (approx. 70/12/6 mm) to be mixed into the soil as irrigation close to the roots and vegetation aid as well as to improve substrate permeability and against compaction, cut from 100 % **biodegradable** wood-based cellulose needle non-woven (approx. 600 g/m^2 , thickness approx. 6 mm, pore content/water storage $\geq 85 \text{ %}$, water storage capacity up to approx. 10 l/kg, **degradation time approx. 1-2 years**).

Mixing ratio for lawns approx. 0.5 to 1.0 l per m², for raised planting beds 5-10 l per m², approx. 10-20 l per tree pit, approx. 3 % vol. for large volumes, 5 - 10 % of vol. for smaller plant pots.

Delivery form: 5 x 50l, 250l or 1000l (ca. 50kg)

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





1.2 LITE-STRIPS Bio5:

Water storage nonwoven in strip form (approx. 70/12/6 mm) for mixing into the soil as irrigation close to the roots and vegetation aid as well as for improving substrate permeability and against compaction, cut from 100 % biodegradable/compostable PLA needle nonwoven (approx. 70% PLA + 30 % cellulose, approx. 500 g/m², thickness approx. 6 mm, pore content/water storage ≥ 85%, water storage capacity up to approx. 10 l/kg, degradation time approx. 5-10 years).

Mixing ratio for lawns approx. 0.5 to 1.0 l per m², for roof greening approx. 1.0 - 2.0 l/m², for raised planting beds 5-10 l per m², approx. 10-20 l per tree pit, approx. 3 % vol. for large volumes, 5 - 10 % of vol. for smaller plant pots.

Delivery form: 5 x 50l, 250l or 1000l (ca. 45 kg)


1.3 LITE-STRIPS PP:

Water storage nonwoven in strip form (approx. 70/12/5 mm) for mixing into the soil as irrigation close to the roots and vegetation aid as well as for improving substrate permeability and against compaction, cut from durable PP needle-punched nonwoven (approx. 600 g/m², UV stabilized, thickness approx. 5 mm, pore content/water storage ≥ 85%, water storage capacity up to approx. 10 l/kg, pore opening width < 80 μm (EN ISO 12956), maximum tensile strength ≥ 40 kN/m (EN ISO 10319)).

Mixing ratio, for lawns approx. 0.5 to 1.0 l per m², for green roofs approx. 1.0 - 2.0 l/m², for raised planting beds 5-10 l per m², approx. 10-20 l per tree pit, approx. 3 % vol. for large volumes, 5 - 10 % of vol. for smaller plant pots.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com

Delivery form: 5 x 50l, 250l or 1000l (ca. 50 kg)





3



2. LITE-**NET** rolls:

For underground air and water supply in 3 sizes each, 2 mesh sizes, 3 materials and 2 thicknesses









Bio1

Bio5

PP

Designation declaration, e.g. for Bio5 520 C20/6:

Bio5: there are 3 material variants: Bio1, Bio5 or PP

520: With a width of 520 cm pulled apart, the largest possible area is obtained

C20: Due to the cut length of 20 cm, the mesh size Ø is approx. 13 cm, net area approx. 85 m², (with C14 the cut length is 14 cm, the mesh size Ø approx. 9 cm, the net area approx. 75 m²)

C20 is standard, C14 is for slope greening.

/6: Thickness approx. 6 mm. For C20 there are 6 or 8 mm, for C14 there are 4- or 6-mm variants.

2.1 LITE-NET Standard roll Bio1 C 20/6:

Net-shaped water storage nonwoven as vegetation aid, installed underground for conducting, distributing and temporarily storing water and air at the root level, cut from 100 % **biodegradable** wood-based cellulose needle nonwoven (approx. **600** g/m², thickness approx. **6** mm, pore content/water storage \geq 85 %, **degradation time approx. 1-2 years**). Rootable drainage net with mesh size \varnothing approx. 13 cm, can be pulled apart to at least 5 times its width.

Delivery form:

- a. Bio1 175 C20/6: **Net area max. 28 m²** with appr. 1,75 x 16,3 m. roll with width appr.0,4 m, length appr.20 m, Ø ca. 0,35 m, weight appr. 4,8 kg.
- b. Bio1 350 C20/6: **Net area max. 57 m²** with appr. 3,5 x 16,3 m. roll with width appr.0,8 m, length appr.20 m, Ø ca. 0,35 m, weight appr. 9,6 kg.
- c. Bio1 520 C20/6: **Net area max. 85 m²** with appr. 5,2 x 16,3 m. roll with width appr.1,2 m, length appr.20 m, Ø ca. 0,35 m, weight appr. 14,4 kg.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





2.2 LITE-NET Standard roll Bio5 C20/6:

Net-shaped water storage nonwoven as vegetation aid, installed underground for conducting, distributing and temporarily storing water and air at the root level, cut from 100 % **biodegradable/compostable** PLA needle nonwoven (approx. 70 % PLA + 30 % cellulose, approx. 500 g/m², thickness approx. 6 mm, pore content/water storage \geq 85 %, **degradation** time approx. 5-10 years). Rootable drainage net with mesh size \varnothing approx. 13 cm, can be pulled apart to at least 5 times the width.

Delivery form:

- a. Bio5 175 C20/6: **Net area max. 28 m²** with appr.1,75 x 16,3 m. roll with width appr.0,4 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 4,0 kg.
- b. Bio5 350 C20/6: **Net area max. 57 m²** with appr.3,5 x 16,3 m. roll with width appr.0,8 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 8 kg.
- c. Bio5 520 C20/6: **Net area max. 85 m²** with appr.5,2 x 16,3 m. roll with width appr.1,2 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 12 kg.

2.3 LITE-NET Standard roll PP C20/5:

Net-shaped water storage nonwoven as a **permanent** vegetation aid, installed underground for conducting, distributing and temporarily storing water and air at the root level, cut from PP - needle nonwoven (approx. **600** g/m², UV stabilized, thickness approx. **5 mm**, pore content/water storage \geq 85%, pore opening width < 80 µm (EN ISO 12956), maximum tensile force \geq 40 kN/m (EN ISO 10319)). Rootable drainage net with **mesh size Ø approx. 13 cm**, can be pulled apart to at least 5 times the width.

Delivery form:

- a. PP 175 C20/5: **Net area max. 28 m²** with appr.1,75 x 16,3 m. roll with width appr.0,4 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 4,8 kg.
- b. PP 350 C20/5: **Net area max. 57 m²** with appr. 3,5 x 16,3 m. roll with width appr.0,8 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 9,6 kg.
- c. PP 520 C20/5: **Net area max. 85 m²** with appr. 5,2 x 16,3 m. roll with width appr.1,2 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 14,4 kg.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





2.4 LITE-NET Standard roll PP C20/7:

Net-shaped water storage nonwoven as a **permanent** vegetation aid, installed underground for conducting, distributing and temporarily storing water and air in the, cut from PP needle-punched nonwoven (approx. **900** g/m², UV stabilized, thickness \geq 7 mm, pore content/water storage \geq 85%, pore opening width \leq 65 µm (EN ISO 12956), maximum tensile force \geq 60 kN/m (EN ISO 10319)). Rootable drainage net with **mesh size** \emptyset approx. 13 cm, can be pulled apart to at least 5 times the width.

Delivery form:

- a. PP 350 C20/7: **Net area max. 57 m²** with appr. 3,5 x 16,3 m. roll with width appr.0,8 m, length appr.20 m, Ø ca. 0,43 m, weight appr. 14,4 kg.
- b. PP 520 C20/7: **Net area max. 85 m²** with appr. 5,2 x 16,3 m. roll with width appr.1,2 m, length appr. 20 m, Ø ca. 0,43 m, weight appr. 20 kg.





2.5 LITE-NET Slope:

Above-ground water storage and erosion protection as a vegetation aid in 2 sizes, 2 materials and 2 thicknesses



2.5.1 LITE-NET slope roll Bio1 C14/4:

Net-shaped water storage nonwoven as a vegetation aid and erosion protection for slopes, laid above ground to collect and store rainwater, cut from 100 % **biodegradable** wood-based cellulose needle nonwoven (approx. 330 g/m², **thickness approx. 4 mm**, pore content/water storage \geq 85 %, **degradation time approx. 1-2 years**). Rootable drainage net with mesh size Ø approx. 9 cm, can be pulled apart to at least 5 times its width. Ideal in combination with spray greening.

Delivery form:

- a. Bio1 350 C14/4: **Net area max. 50 m²** with appr. 3,5 x 14,3 m. roll with width appr. 0,8 m, length appr. 20 m, Ø ca. 0,35 m, weight appr. 5,3 kg.
- b. Bio1 520 C14/4: **Net area max. 75 m²** with appr. 5,2 x 14,3 m. roll with width appr. 1,2 m, length appr. 20 m, Ø appr. 0,35 m, weight appr. 7,9 kg.

2.5.2 LITE-**NET slope** roll Bio1 C14/6:

Net-shaped water storage nonwoven as a vegetation aid and erosion protection for slopes, laid above ground to collect and store rainwater, cut from 100 % **biodegradable** wood-based cellulose needle nonwoven (approx. 600 g/m², **thickness approx. 6 mm**, pore content/water storage \geq 85 %, **degradation time approx. 1-2 years**). Rootable drainage net with mesh size Ø approx. 9 cm, can be pulled apart to at least 5 times its width. Ideal in combination with spray planting.

Delivery form:

- a. Bio1 350 C14/6: **Net area max. 50 m²** with appr. 3,5 x 14,3 m. roll with width appr.0,8 m, length appr.20 m, Ø appr. 0,35 m, weight appr. 9,6 kg.
- b. Bio1 520 C14/6: **Net area max. 75 m²** with appr. 5,2 x 14,3 m. roll with width appr. 1,2 m, length appr. 20 m, Ø appr. 0,35 m, weight appr. 14,4 kg

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





2.5.3 LITE-NET slope roll Bio5 C14/6:

Net-shaped water storage nonwoven as a vegetation aid and erosion protection for slopes, laid above ground to collect and store rainwater, cut from 100 % **biodegradable/compostable** PLA needle nonwoven (approx. 70 % PLA + 30 % cellulose, approx. 500 g/m², **thickness approx. 6 mm**, pore content/water storage \geq 85 %, **degradation time approx. 5-10 years**). Rootable drainage net with mesh size \varnothing approx. 9 cm, can be pulled apart to at least 5 times its width. Ideal in combination with spray greening.

Delivery form:

- a. Bio5 350 C14/6: **Net area max. 50 m²** with appr.3,5 x 14,3 m. roll with width appr.0,8 m, length appr.20 m, Ø ca. 0,35 m, weight appr. 8 kg.
- b. Bio5 520 C14/6: **Net area max. 75 m²** with appr.5,2 x 14,3 m. roll with width appr.1,2 m, length appr.20 m, Ø ca. 0,35 m, weight appr. 12 kg.





3. LITE-**NET tree**:

Pre-assembled vegetation and distribution nets for tree new plantings in 2 sizes* and 3 materials for wrapping around root balls and/or for horizontal laying under the root ball:







Bio5



Bio1

Р

3.1 LITE-NET tree Bio1:

Ready-made drainage net for large-scale underground water and air supply of root balls, cut from 100 % **biodegradable** wood-based cellulose needle nonwoven (approx. 600 g/m², thickness approx. 6 mm, pore content/water storage \geq 85 %, **degradation time approx. 1-2 years**).

Delivery form:

- a. LITE-**NET tree** Bio1 L: Rootable nonwoven net with mesh size appr. Ø 10 cm for the wrapping of **root balls** Ø up to max. 60/65 cm, size max. 1,2 m² with appr.1,5 x 0,8 m.
- b. LITE-**NET tree** Bio1 XL: Rootable nonwoven net with mesh size appr. Ø 13 cm for the wrapping of **root balls** Ø = **from approx. 60 cm**, size max. 2,8 m² with appr.1,75 x 1,6 m.

3.2 LITE-NET tree Bio5:

Ready-made drainage net for large-scale underground water and air supply of root balls, cut from 100 % **biodegradable/compostable** PLA needle nonwoven (approx. 70% PLA + 30 % cellulose, approx. 500 g/m², thickness approx. 6 mm, pore content/water storage \geq 85%, **degradation time approx. 5-10 years**).

Delivery form:

- a. LITE-**NET tree** Bio5 L: Rootable nonwoven net with mesh size appr. Ø 10 cm for the wrapping of **root balls** Ø **up to max.** 60/65 cm, size max. 1,2 m² with appr.1,5 x 0,8 m.
- b. LITE-**NET tree** Bio5 XL: Rootable nonwoven net with mesh size appr. Ø 13 cm for the wrapping of **root balls** Ø = **from approx. 60 cm**, size max. 2,8 m² with appr.1,75 x 1,6 m.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





3.3 LITE-NET tree PP:

Ready-made drainage net for large-scale underground water and air supply of root balls, cut from durable PP needle nonwoven (approx. 600 g/m², UV stabilized, thickness approx. 5 mm, pore content/water storage \geq 85%, pore opening width < 80 µm (EN ISO 12956), maximum tensile force \geq 40 kN/m (EN ISO 10319)).

Delivery form:

- a. LITE-**NET tree** PP L: Rootable nonwoven net with mesh size appr. Ø 10 cm for the wrapping of **root balls** Ø **up to max. 60/65 cm**, size max. 1,2 m² with appr.1,5 x 0,8 m.
- b. LITE-**NET tree** PP XL: Rootable nonwoven net with mesh size appr. Ø 13 cm for the wrapping of **root balls** Ø = **from approx. 60 cm**, size max. 2,8 m² with appr.1,75 x 1,6 m.

 $\textbf{Lite-Soil GmbH} \ | \ \text{Neustiftgasse} \ 94/23, A-1070 \ \text{Vienna} \ | \ +43 \ 1 \ 5227310 \ | \ \text{office@lite-soil.com} \ | \ \text{www.lite-soil.com}$





4. Root protection nonwoven for construction sites (LITE-ROOTPROTECT):

4.1 root curtain:

Full-surface nonwoven as biodegradable construction site protection with water storage function in 2 widths:

Root curtain, 330 g/m²:

100 % **biodegradable** water storage and protection nonwoven for root curtains (pore content > 85 %, fiber thickness < 2 dtex, weight appr. 330 g/m², thickness min. 3.5 mm, maximum tensile strength lengthwise/crosswise > 190 N/5 (DIN EN 29073-3)). 100 % cellulose needle nonwoven without chemical additives.

Nonwoven can simply be poured over at the end of the construction site and supports irrigation and deep aeration for **approx. 1-2 years**.

On request with center/edge flap for inserting irrigation tubes.

Delivery form:

- a. Root curtain M: roll with 80 cm width and 20 m length
- b. Root curtain L: roll with 120 cm width and 20 m length

4.2 root bandage:



Nonwoven roll as biodegradable construction site protection with water storage function:

Root bandage 330 g/m²:

100 % biodegradable root bandage to protect exposed roots at construction sites.

Water storage needle nonwoven made of 100 % cellulose without chemical additives for moisture retention as well as mechanical and UV protection. Pore content > 85%, fiber thickness < 2 dtex, weight appr. 330 g/m², thickness min. 3.5 mm, maximum tensile strength lengthwise/crosswise > 190 N/5 (DIN EN 29073-3).

Nonwoven can simply be poured over at the end of the construction site. **Degradation time** approx. 1-2 years

Delivery form: 8 pieces rolls with width 10 cm and length 8 m
16 pieces rolls with width 10 cm and length 8 m

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





5. BLUELITE-NET:

For water-saving underground irrigation of lawns, athletic fields, golf courses, green roofs, slopes, etc.

(system consisting of 2 components, a distribution net and a nonwoven-covered drip tube laid on top of it):



5.1 LITE-**NET Standard** roll PP (component 1):

Distribution net with 2 thicknesses, C20/5 or C20/7 (2.3 and 2.4)

+

5.2 BLUELITE-TUBE (component 2):

Nonwoven covered drip irrigation tube (Rivulis D5000 PCAS hose with 16 mm (13.8 / 15.83 mm), 0.5 - 3.5 bar, 40 mil (1.02 mm), 1.5 l/h, 30 cm dripper distance).

Protective nonwoven cover with water distribution function made of durable PP needle nonwoven (approx. 360 g/m^2 , UV stabilized, thickness approx. 3.3 mm, pore opening width < 90 µm (EN ISO 12956)), maximum tensile force $\geq 25 \text{ kN/m}$ (EN ISO 10319), width approx. 6 cm, for laying on LITE-**NET** drainage nonwoven mesh with spacing approx. 50 - 60 cm (if required, fastening by means of plug-in bracket).

Roll length appr. 100 m.

or

5.3 BLUELITE-**COVER** (component 2, without drip irrigation tube):

Protective and distribution nonwoven cover for drip irrigation pipes, made of durable PP needle nonwoven (approx. 360 g/m^2 , UV stabilized, thickness approx. 3.3 mm, pore opening width $< 90 \text{ }\mu\text{m}$ (EN ISO 12956)), maximum tensile force $\ge 25 \text{ kN/m}$ (EN ISO 10319), width approx. 6 cm, for insertion of own or individual irrigation tubes for laying on LITE-NET drainage nonwoven net with spacing approx. 50 -60 cm (if required, fastening by means of plug-in bracket).

Roll length appr. 25 m.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





6. LITE-CUBES:

Extra-small water storage cubes for long-term irrigation and aerification as well as for mixing into the spray irrigation slurry, in 3 material variants:



6.1. LITE-CUBES Bio1:

Water storage nonwoven in cube form (approx. 12/12/6 mm) cut from 100 % **biodegradable** woodbased cellulose needle nonwoven (approx. 600 g/m², thickness approx. 6 mm, pore ratio/water storage ≥ 85 %, water storage capacity approx. up to 10 l/kg, **degradation time approx. 1-2 years**) for mixing into the substrate for growing pots or for spray planting. Mixing ratio of approx. 5-10 % by volume for growing pots.

Delivery form: 5 x 50l, 250l or 1000l (appr. 60 kg)

6.2 LITE-CUBES Bio5:

Water storage nonwoven in cube form (approx. 12/12/6 mm), cut from 100 % biodegradable/compostable PLA needle nonwoven (approx. 70% PLA + 30 % cellulose, approx. 500 g/m², thickness approx. 6 mm, pore content/water storage ≥ 85%, water storage capacity approx. up to 10 l/kg, degradation time approx. 5-10 years) for sweeping into aerification holes, e.g. on golf courses or into slot drains on lawns.

Delivery form: 5 x 50l, 250l or 1000l (appr. 55 kg)

6.3 LITE-CUBES PP:

Water storage nonwoven in cube form (approx. 12/12/5 mm), cut from **durable**, reusable PP needle-punched nonwoven (approx. 600 g/m^2 , UV stabilized, thickness approx. 5 mm, pore content $\geq 85\%$, pore opening width $< 65 \mu m$ (EN ISO 12956), water storage capacity approx. up to 10 l/kg). Mixing ratio of approx. 5-10 % by volume for green roofs.

Delivery form: 5 x 50l, 250l or 1000l (appr. 60 kg)

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





7. BLUELITE-RING:

For effective, uniform, protected and long-term underground irrigation.
For new plantings in combination with LITE-**NET tree**.



7.1 BLUELITE-RING: Ready-made for trees

BLUELITE-RING: Nonwoven-covered irrigation tube (3 outlet openings per m, appr.2l water per opening/h, tube diameter 16 mm) with water distribution function made of durable PP needle nonwoven (appr.360 g/m², UV stabilized, thickness appr.3.3 mm, pore opening width < 90 µm (EN ISO 12956)), maximum tensile force ≥ 25 kN/m (EN ISO 10319), width appr.6 cm, for covered laying around a tree trunk. **Ring diameter approx. 50 cm**.

Sales unit:10 pcs.

7.2 BLUELITE-**TUBE** and **BLUE**LITE-**COVER**: Long rolls for individual cutting for new tree planting, with and without irrigation tube:

BLUELITE-TUBE:

Nonwoven-covered irrigation tube (Rivulis D5000 PCAS hose with 16 mm (13.8 / 15.83 mm), 0.5 - 3.5 bar, 40 mil (1.02 mm), 1.5 l/h, 30 cm dripper distance) with water distribution function made of durable PP needle nonwoven (appr.360 g/m², UV stabilized, thickness appr.3.3 mm, pore opening width < 90 μ m (EN ISO 12956)), maximum tensile force \geq 25 kN/m (EN ISO 10319), width appr.6 cm, for covered laying around or along trees.

Roll length: 100 m.

BLUELITE-COVER:

Protective and distribution cover made of durable PP needle fleece (approx. 360 g/m², UV-stabilised, thickness approx. 3.3 mm, pore size < 90 μ m (EN ISO 12956)), maximum tensile strength \geq 25 kN/m (EN ISO 10319) , width approx. 6 cm, for inserting your own or individual irrigation pipes and then laying them covered around or along trees.


Roll length: 100 m.

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com





PRODUCT RECOMMENDATIONS:

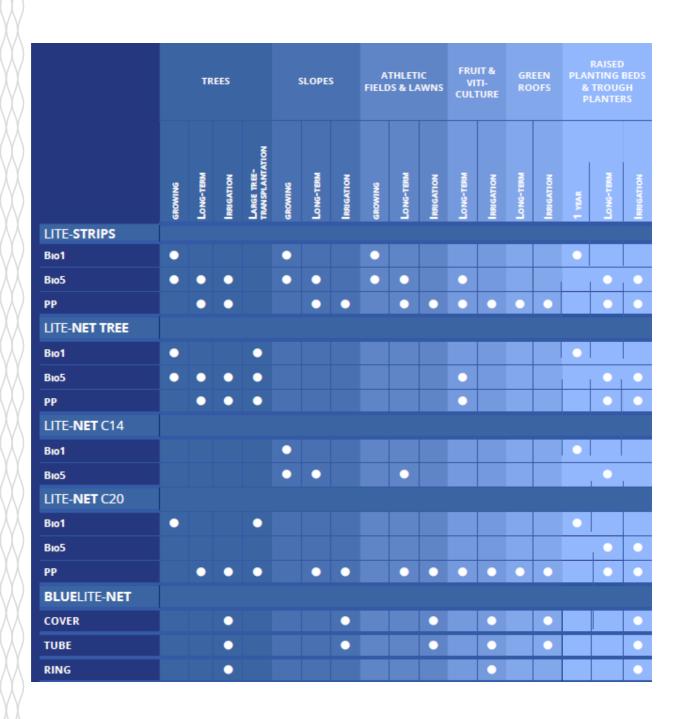

Lite-Soil GmbH | Neustiftgasse 94/23, A-1070 Vienna | +43 1 5227310 | office@lite-soil.com | www.lite-soil.com

